



The Type A Foundation is the normally required foundation construction. Where rock is encountered, the Engineer may approve the use of the Type B or C Foundation. Prior to installing a foundation in rock, obtain a subsurface investigation certified by a geotechnical engineer licensed in the State of Iowa.

- 1) Shape top 11 inches with forms. See Detail 'A'.
- (2) Install rodent guard or non-shrink grout with weep hole.
- 3 Furnish nut, nut and plate, or nut and anchor bolt assembly ring plate on embedded end.
- 4) Provide conduits as per plans.
- 5 Install ground rod adjacent to foundation or in adjacent

Max. Mast Arm Length	Foundation		"V" Bars			Tie Bars					
	W	L	Count	Size	Length	Count	Upper Spacing		Lower Spacing		
							# Spaces	(S ₁)	# Spaces	(S_2)	
35'-0"	3'-0"	12'-0"	12	#8	11'-6"	17	9	12"	N/A	N/A	
45'-0"	3'-0"	14'-0"	12	#8	13'-6"	19	11	12"	N/A	N/A	
55'-0"	3'-0"	16'-0"	12	#8	15'-6"	25	12	8"	5	12"	
60'-0"	3'-0"	18'-0"	13	#8	17'-6"	28	15	8"	5	12"	
70'-0"	3'-6"	18'-0"	12	#10	17'-6"	28	15	8"	5	12"	
80'-0"	3'-6"	21'-0"	14	#10	20'-6"	40	28	6"	4	12"	
90'-0"	4'-0"	22'-0"	16	#10	21'-6"	42	24	6"	10	8"	
100'-0"	4'-0"	24'-0"	18	#10	23'-6"	47	32	6"	7	8"	





REVISIONS: Removed hooks from foundation reinforcing. Updated notes for condu installation. Clarified placement of ground rod.

The D. Wingard Substitute.

SUDAS DIRECTOR DESIGN METHODS ENGINEER


STANDARD ROAD PLAN

TS-102


SUDAS O IOWADOT

FIGURE 8010.102

TRAFFIC SIGNAL POLE FOUNDATION

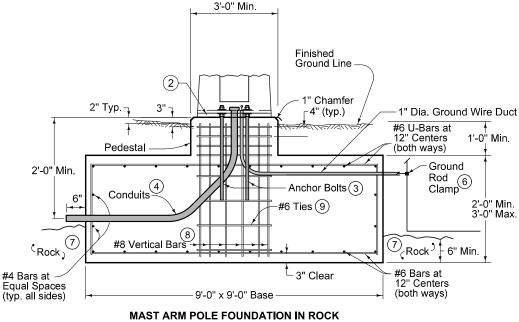

TYPE B FOUNDATION





Type B Foundation is applicable for traffic signal poles with mast arm lengths up to 60 feet.

If the excavation for a Type B Foundation is left open for more than 1 calendar day, install temporary barrier rail if any part of the excavation is located within the clear zone. Temporary barrier rall layout requires the Engineer's approval.

Competent rock has an average unconfined compressive strength (q₁₁) of at least 2.0 ksi and rock quality designation of at least 90%. Conditions not meeting minimum requirements will require either:

- A site specific design, or
- Using the parameters for Mast Arm Pole Foundation in Soil.
- (2) Install rodent guard or non-shrink grout with weep hole.
- Furnish nut, nut and plate, or nut and anchor bolt assembly ring plate on embedded end.
- Provide conduits as per plans.
- When in contact with rock, place ground rods as specified in National Electrical Code, current edition, adjacent to foundation or in adjacent handhole.
- Cast foundation concrete against competent rock. If foundation is formed, place backfill with concrete cast against rock.
- Place 13 equally spaced #8 vertical bars.
- #6 bars spaced at 8 inch maximum. Ties may be welded to vertical bars.



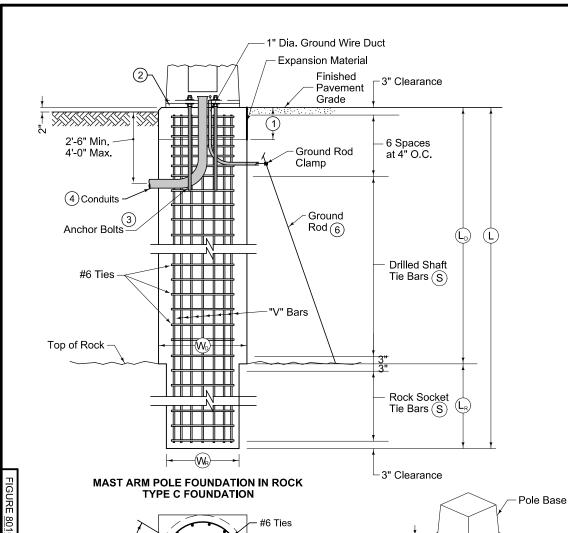

"V" Bars

(Typ.)

PLAN VIEW

(See Table for Count)

6" Clear Cover Drilled Shaft

3" Clear Cover Rock Socket

1'-10" min

11"

DETAIL 'A'

Shape with Forms

(Square or Circular)

- 1) Shape top 11 inches with forms. See Detail 'A'.
- (2) Install rodent guard or non-shrink grout with weep hole.
- (3) Furnish nut, nut and plate, or nut and anchor bolt assembly ring plate on embedded end.
- 4) Provide conduits as per plans.
- (6) When in contact with rock, place ground rods as specified in National Electrical Code, current edition, adjacent to foundation or in adjacent handhole.

Max. Mast Arm Length	Foundation							"V" Bars		
	(W _D)) (W _R) (L)***				(L _R)****	Carrat	Size	Longeth	(S)
	Min.	Min.	Max.	(L _D)	Broken Rock*	Competent Rock**	Count	Size	Length	Spacing
35'-0"	3'-0"	2'-6"	12'-0"	VARIES L _D =(L-L _R)	4'-6"	3'-0"	13	#8	L - 6"	6"
45'-0"	3'-0"	2'-6"	14'-0"		4'-6"	3'-0"	13	#8	L - 6"	6"
55'-0"	3'-0"	2'-6"	16'-0"		4'-6"	3'-0"	13	#8	L - 6"	6"
60'-0"	3'-0"	2'-6"	18'-0"		4'-6"	3'-0"	13	#8	L - 6"	6"
70'-0"	3'-6"	3'-0"	18'-0"		5'-6"	3'-6"	14	#9	L - 6"	5½"
80'-0"	3'-6"	3'-0"	21'-0"		5'-6"	3'-6"	14	#9	L - 6"	5½"
90'-0"	4'-0"	3'-6"	22'-0"		6'-0"	4'-0"	15	#10	L - 6"	5½"
100'-0"	4'-0"	3'-6"	24'-0"		6'-0"	4'-0"	15	#10	L - 6"	5½"

*Broken rock has an average unconfined compressive strength (q_u) of at least 1.0 ksi and rock quality designation of at least 20%.

**Competent rock has an average unconfined compressive strength (q_u) of at least 2.0 ksi and rock quality designation of at least 90%.

***Total foundation length L must be sufficient to provide a 3 inch clearance between the bottom of the traffic signal pole anchor bolts and the bottom of the rock socket.

****The Rock Socket Length L_R can be decreased if the total length of the shaft is L long as shown in the table.

Conditions not meeting minimum requirements will require site specific designs or shall use the Type A Foundation Soil parameters.



TRAFFIC SIGNAL POLE FOUNDATION

